

DYNACOLD HIGH SPEED GLUE APPLICATOR



The Dynatec Advantage

- *Two millisecond cycle time*
- *Robust ball and seat design along with the elimination of dynamic seals result in minimized wear and extended life*
- *Stainless steel construction and proven modular components*
- *Adhesive application pressures to 600 psi (40 bar) with fluid viscosities to 6000 centipoise*

ITW Dynatec™

Adhesive Application Solutions

DYNACOLD HIGH SPEED GLUE APPLICATOR

MODEL	DynaCold 1	DynaCold 2	DynaCold 3
Application Pattern Type of application	line or dot non contact	line or dot contact or non contact	line contact
Number of orifices	1	1-2	1-20 (nozzle plate)
Shutter	option	N/A	N/A
General Operational Data	Voltage 24 V DC, 9 watt		Shutter Air Pressure 60 to 90 psi (4 to 6 bar)

OPTIONS: • Nozzle shutter sealing device • Selection of mounting bracketry




DynaCold 1




DynaCold 2



DynaCold 3

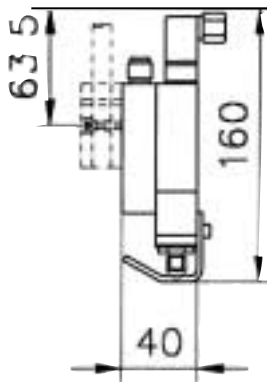

DynaCold 1

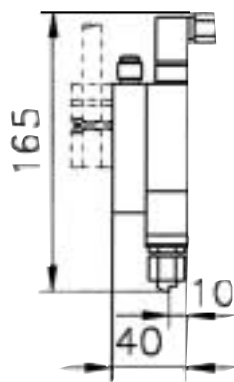


DynaCold 2



DynaCold 1 & 2

Dimensions
in mm

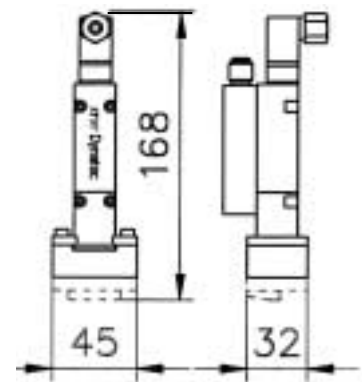

DynaCold 3



Adhesive Application Solutions



AMERICAS
ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615-824-3634
1-800-860-6150
Fax 615-264-5248

ASIA and PACIFIC
ITW Dynatec K.K.
Daiwashinagawa Bldg.,
7-15, Konan, 3-Chome
Minato-Ku, Tokyo 108-0075 Japan
Telephone 81-3-3450-5901
Fax 81-3-3450-8405

EUROPE, AFRICA and MIDDLE EAST
ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone 49-2104-915-0
Fax 49-210-2104-915-111
e.mail@itwdynatec.de

itwdynatec.com