

DYNAMELT® S SERIES ADHESIVE SUPPLY UNIT




The Dynatec Advantage

- *MELT-ON-DEMAND Hopper Grid extends adhesive life and performance*
- *Self-diagnostic DYNACONTROL™ P.I.D. Digital Temperature Controller with platinum sensor accuracy*
- *Seven combinations of hopper sizes and melt rate selections fitted with either piston or gear pump*
- *Easily removable access covers completely expose all components for easy maintenance*

TW Dynatec™

Adhesive Application Solutions

DYNAMELT® S SERIES ADHESIVE SUPPLY UNIT

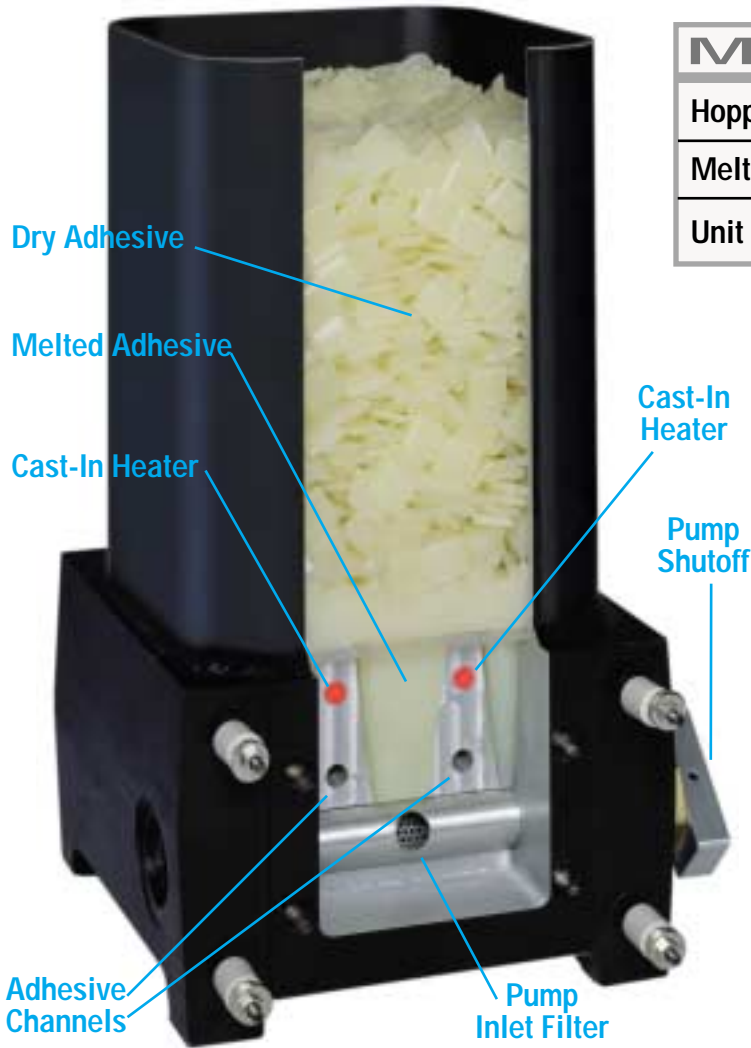

MODEL	S05	S10	S10G	S22	S22G	S45	S45G
Hopper Capacity	5 kg 10 lb	9 kg 20 lb	9 kg 20 lb	22 kg 48 lb	22 kg 48 lb	45 kg 100 lb	45 kg 100 lb
Melt Rate *	10 kg 23 lb	11 kg 23 lb	19 kg 42 lb	23 kg 50 lb	41 kg 90 lb	23 kg 50 lb	41 kg 90 lb
Unit Dim.	Footprint	35,6 x 74,5 cm / 14 x 29.3 in		35,6 x 83,8 cm / 14 x 33 in			
	Height	41,9 cm 16.5 in	61 cm / 24 in			101,6 cm / 40 in	

* Melt rates vary with adhesive type.

Voltage 200/240 single phase or 380 three phase. All units capable of 6 hoses and applicators. Units can be fitted with a piston or gear pump.

Optional Accessories

- Memory card
- Adhesive level sensor
- Pendant control panel
- Seven day scheduler
- Analog or digital adhesive pressure indicator
- RS232, 485 computer serial interface



Memory card being inserted into the *DYNACONTROL™* Control Panel

MELT-ON-DEMAND Adhesive Hopper

- Patented hopper grid
- Hopper grid melts only the adhesive that is demanded by the application
- Adhesive charring is virtually eliminated
- Energy saving reduced heater duty cycle time
- Faster up-to system ready temperature
- 7 year melt-on-demand hopper warranty
- Pump shut-off valve
- Memory card retains important application data
- Easy to use push button controls with multi-lingual digital display
- Accurate nozzle temperature maintained
- Pendant control panel option can be placed up to 30m/100ft from the DYNAMELT® Adhesive Supply Unit

TW Dynatec™

Adhesive Application Solutions



AMERICAS
ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615-824-3634
1-800-860-6150
Fax 615-264-5248

ASIA and PACIFIC
ITW Dynatec K.K.
Daiwashinagawa Bldg.,
7-15, Konan, 3-Chome
Minato-Ku, Tokyo 108-0075 Japan
Telephone 81-3-3450-5901
Fax 81-3-3450-8405

EUROPE, AFRICA and MIDDLE EAST
ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone 49-2104-915-0
Fax 49-210-2104-915-111
e.mail@itwdynatec.de

itwdynatec.com